WaveLinx LITE

Office | Education | Industrial | Parking Garage

Simple. Secure. Scalable.

WaveLinx LITE

COOPER Lighting Solutions
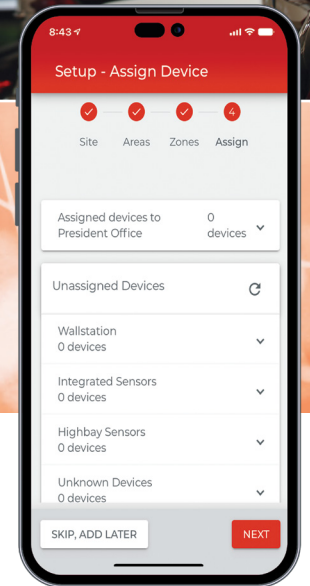
cooperlighting.com

WaveLinx LITE

WaveLinx LITE is **SO SIMPLE** setup can be completed on-site with your own mobile device without an IT network or support.

Building upon known motion sensor solutions, the WaveLinx LITE solution eliminates all the hassles associated with a complex lighting controls solution and makes the commissioning process intuitive and flexible, giving more power to installers and building managers.

With integrated wireless occupancy and daylight sensors the system is not only ASHRAE, IECC and CA Title 24 code compliant for many applications, but also triggers additional utility incentives for smart controls.

Simple. Secure. Scalable.

Integrated sensors provide immediate out-of-the-box performance and can be configured as a system from a secure mobile application.
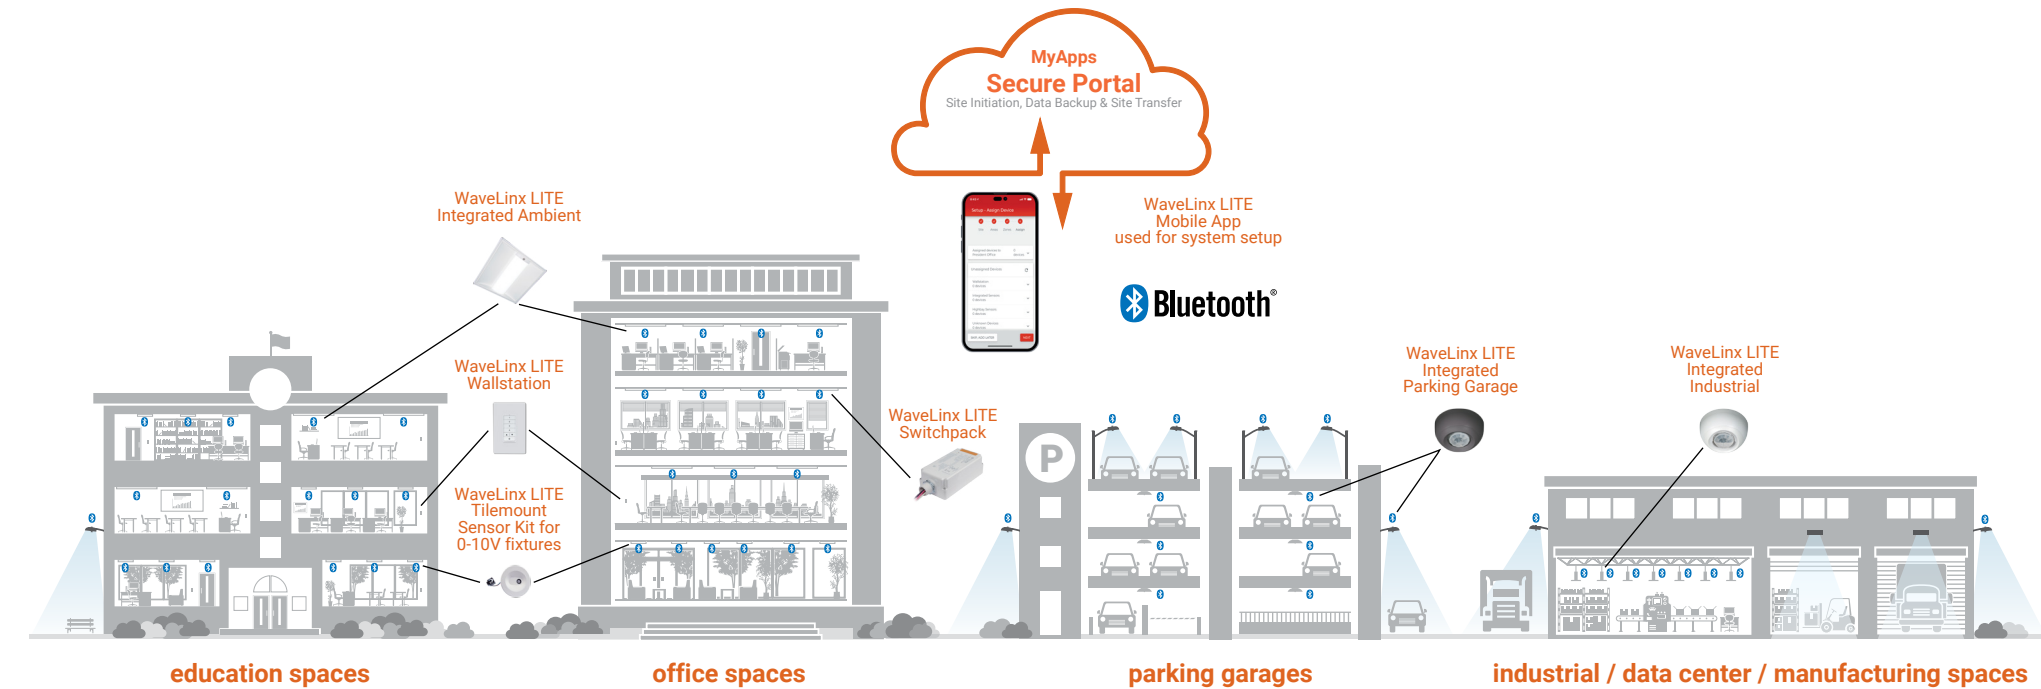
LIGHTING

Advanced LED fixtures

MOBILE APP

Intuitive project provisioning and configuration tool

SECURE PORTAL

Initiate new projects, transfer completed projects to building owners, and store backup data safely

MyApps
Secure Portal
Site Initiation, Data Backup & Site Transfer

WaveLinx LITE
Integrated Ambient

WaveLinx LITE
Mobile App
used for system setup

WaveLinx LITE
Wallstation

WaveLinx LITE
Switchpack

WaveLinx LITE
Tilemount
Sensor Kit for
0-10V fixtures

WaveLinx LITE
Integrated
Parking Garage

WaveLinx LITE
Integrated
Industrial

Bluetooth®

education spaces

office spaces

parking garages

industrial / data center / manufacturing spaces

FLEXIBLE INSTALLATION...
SIMPLIFIED

Complete retrofits with ease with integral sensors, eliminating the need for 0-10v or additional communication wires to be run between fixtures. No additional network wiring required, perfect for retrofits or tenant upfits.

Blends the simplicity of a standalone installation with the usability of a controlled system for an easily configured space with an exceptional occupant experience.

For standalone and controlled applications, WaveLinx LITE provides out-of-the-box functionality with no gateways required and factory startup is not needed.

Office

Education

Industrial

Parking Garage

WaveLinx LITE solves problems experienced with individually controlled and standalone fixtures

Standalone		Controlled WaveLinx LITE
✓	Out-of-the-box functionality	✓
✓	Closed loop daylighting	✓
✓	Occupancy detection	✓
x	Configurable control zones	✓
x	Occupancy groups	✓
x	Daylighting groups	✓
x	Programmable scenes	✓
By fixture	Customization	By group
IR remote	Customization device	Mobile app

Individual Performance

Standalone - office / education floor

**Standalone -** industrial floor

Standalone - parking garage floor

Intelligent Groups

WaveLinx LITE - office / education floor

WaveLinx LITE - industrial floor

WaveLinx LITE - parking garage floor

SCALABLE TECHNOLOGY

Standalone AND easily customized control?

WaveLinx LITE enabled luminaires can operate in standalone mode (individually controlled luminaires), in groups (areas and zones) and can even be upgraded to WaveLinx PRO enabled luminaires.*

	Luminaire with standalone sensor	Standalone Spaces WaveLinx LITE	Standalone Spaces WaveLinx CAT	Networked Spaces WaveLinx PRO	Enterprise WaveLinx CORE
Occupancy	Yes	Yes	Yes	Yes	Yes
Daylighting	Yes	Yes	Yes	Yes	Yes
Wallstations	–	Yes	Yes	Yes	Yes
Gateways	–	–	–	1 WAC	300 WACs
Devices (MAX)	–	40 per Area (1120 per space)	40 per Area	200 per WAC2	32,500 per CORE Enterprise
Software	–	WaveLinx LITE Mobile App	WaveLinx CAT Mobile App	WaveLinx Mobile App	CORE
Areas	–	28 per Space	Unlimited	50 per WAC2	up to 3,000
Zones	–	16 per Area	16 per Area	16 per Area	up to 9,000
Scheduling	–	–	–	Local	Global
VividTune™	–	–	–	Yes	Yes
Plug-Load Control	–	Yes	Yes	Yes	Yes
Low-Voltage Power	–	–	Yes	Yes	Yes
Integration	–	–	–	–	BACnet, API
Dashboards	–	–	–	–	Energy, Occupancy
Configuration	–	Installer	Installer	Technician	Technician / IT

SCALABILITY

devices → areas → floors → buildings

WaveLinx expands from a single standalone device up to Enterprise with 32,500 devices

Note: WaveLinx LITE devices can be upgraded to WaveLinx PRO via an OTA firmware update. The OTA and system configuration can only be performed by Cooper Lighting Solutions specialists. WaveLinx Area Controller(s) would also need to be added to complete the solution.

Basic code compliance in a simple package

WaveLinx LITE offers useful out-of-the-box functionality and the ability to customize installations with a secure downloadable mobile application targeted at office, education, industrial and parking garage applications.

Control your own timeline
Securely configure and maintain your projects on your timeline.

Only pay for what you need
No gateways, servers, Integrators and IT involvement or paid technicians required for installation or setup.

Be ready for connected
WaveLinx LITE components will be upgradeable to be a part of the WaveLinx PRO Wireless System with connectivity to WaveLinx CORE.

Manage it all, from your mobile device
Configure your system conveniently through an intuitive mobile application.

Simple, affordable, and secure... why settle for less?

Wireless. Code Compliant. Cost Effective.

Lighting Fixture with Integrated Sensor
Highly efficient LED fixtures

Wireless Wallstation
Pre-configured capabilities and fully customizable for each area

Dimming Switchpack
Used to control luminaires and plug loads

Mobile Application
Easily configure spaces from your own mobile device

Reduce Configuration Time & Cost by 20%
for initial system set-up versus typical standalone installations

STAY **SECURE**
with ultimate peace of mind

With information security threats and fears on the rise, WaveLinx LITE is designed to keep your project and data on lock down with a secure cloud portal.

Preparation
(internet connection required)
- Create project sites from secure cloud portal
- Mobile app account receives a secure key to commission projects assigned to user

Configuration
- Mobile app used to configure project sites via Bluetooth on premises
- No internet connection required to configure or operate project site

Completion
(internet connection required)
- Site data is securely synced with the cloud portal for backup
- Cloud also used to securely transfer site ownership from installer to project owner

Cloud portal technology provides security to each site preventing unauthorized access

Physical barriers to entry
A smart devices paired with a digital key from a secure portal is required to access the system

Customer security
NIST Cybersecurity Framework and industry best practices

Network security
Multi-layered, built-in security controls and unique threat intelligence

Reduce re-configuration time and cost by
75%
or more
### when compared to standalone installations

The sensor is factory wired and ready to meet code out-of-the-box

Automatic code compliance?
Yes, it's true

No more waiting weeks for commissioning technicians, paying for expensive IT support, or purchasing unnecessary hardware. With WaveLinx LITE, you can finish the job more quickly, and move on to the next.

- Standalone operation that meets code and simple setup that exceeds expectations
- Wireless integrated sensors ensure maximum efficiency
- A simple mobile app allows building managers to easily adjust settings, even after the project has finished, with no need to go back into the wall
- Connected fixtures provide a platform for future scalability
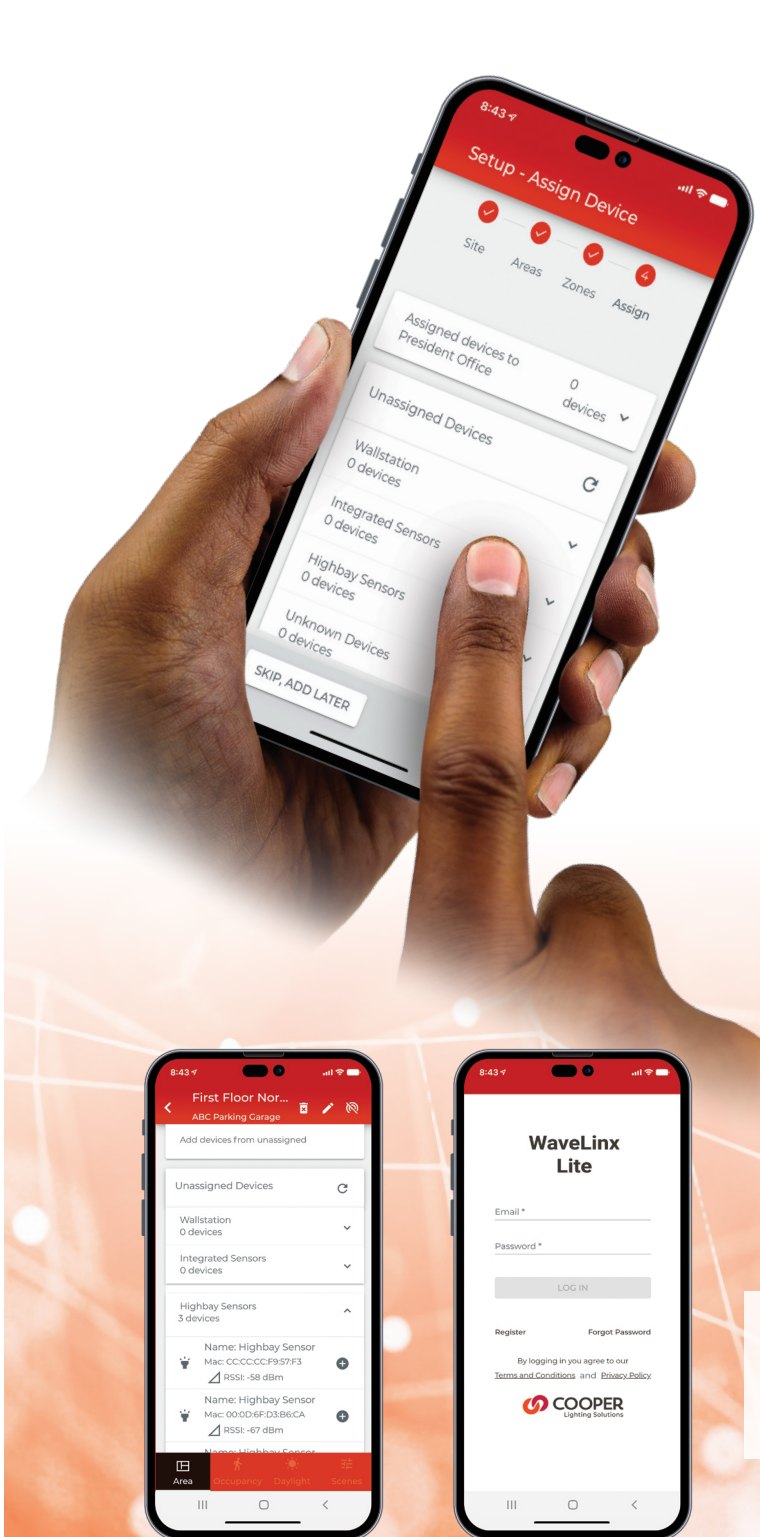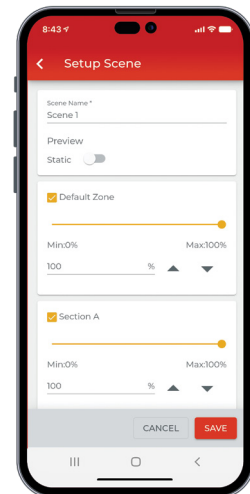
Intuitive code compliant set-up...
at your fingertips

You would set up your own lighting controls projects if they were this simple.

- Utilize a cloud portal to securely initiate projects, then add devices to areas and zones - even create custom scenes
- Configure a standalone device or an entire space using a mesh network all from the WaveLinx LITE smart mobile app - no gateways, servers, or IT involvement required
- Expedite configuration by identifying devices with wireless signal strength indication and eliminate repetitive configurations using customizable templates
- Edit capabilities prevent data loss or overwritten data when provisioning with multiple users
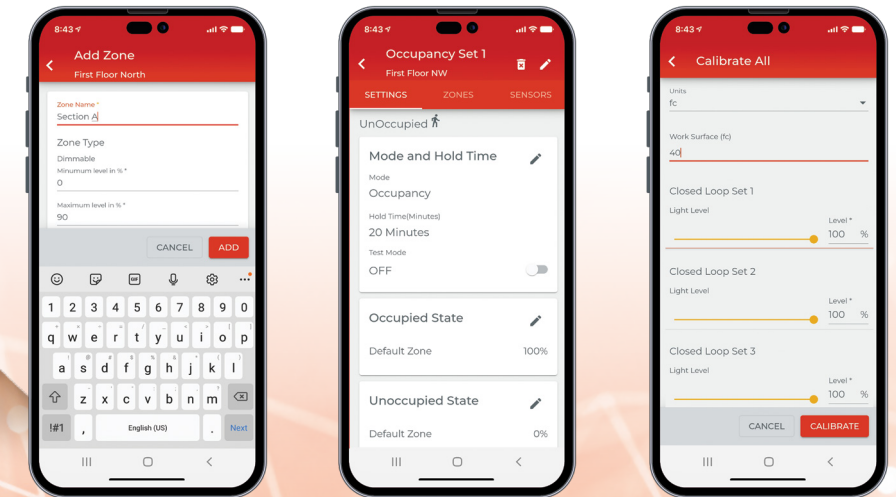
The WaveLinx LITE App can be downloaded via the Apple Store® or Google Play and is an accessory to the WaveLinx LITE Wireless system.

WaveLinx LITE mobile app features

Network Security | Manual Dimmer | Occupancy Sensor | Daylighting Control | Manually Switched ON/OFF | Task Tuning | Lumen Maintenance Control | Scenes

WaveLinx LITE System Design Steps

1 **Installation**

- WaveLinx LITE luminaires have out-of-the-box capabilities that may satisfy many applications

2 **Project Site Preparation**
(internet connection required)

- Download and register WaveLinx LITE mobile app
- Watch training videos and learn hands-on with the app Demo Mode
- Plan project per guidelines
- Create an organization, buildings and spaces, with secure cloud portal from scratch or starting with a custom template

3 **On-Site Configuration**
(Bluetooth connection required)

- Scan using signal strength and provision devices by Area
- Create zones, occupancy sets, optional daylight groups, and calibrate daylight harvesting (manual or automated)
- Set occupancy or vacancy mode actions and hold times, configure scenes, set trim levels, etc.

4 **Project Completion**
(internet connection required)

- Backup all project site data in secure cloud portal
- Sync areas and spaces to the cloud, combining all spaces into one building
- Transfer site ownership from contractor to owner

5 **Project Updates**
(internet connection required)

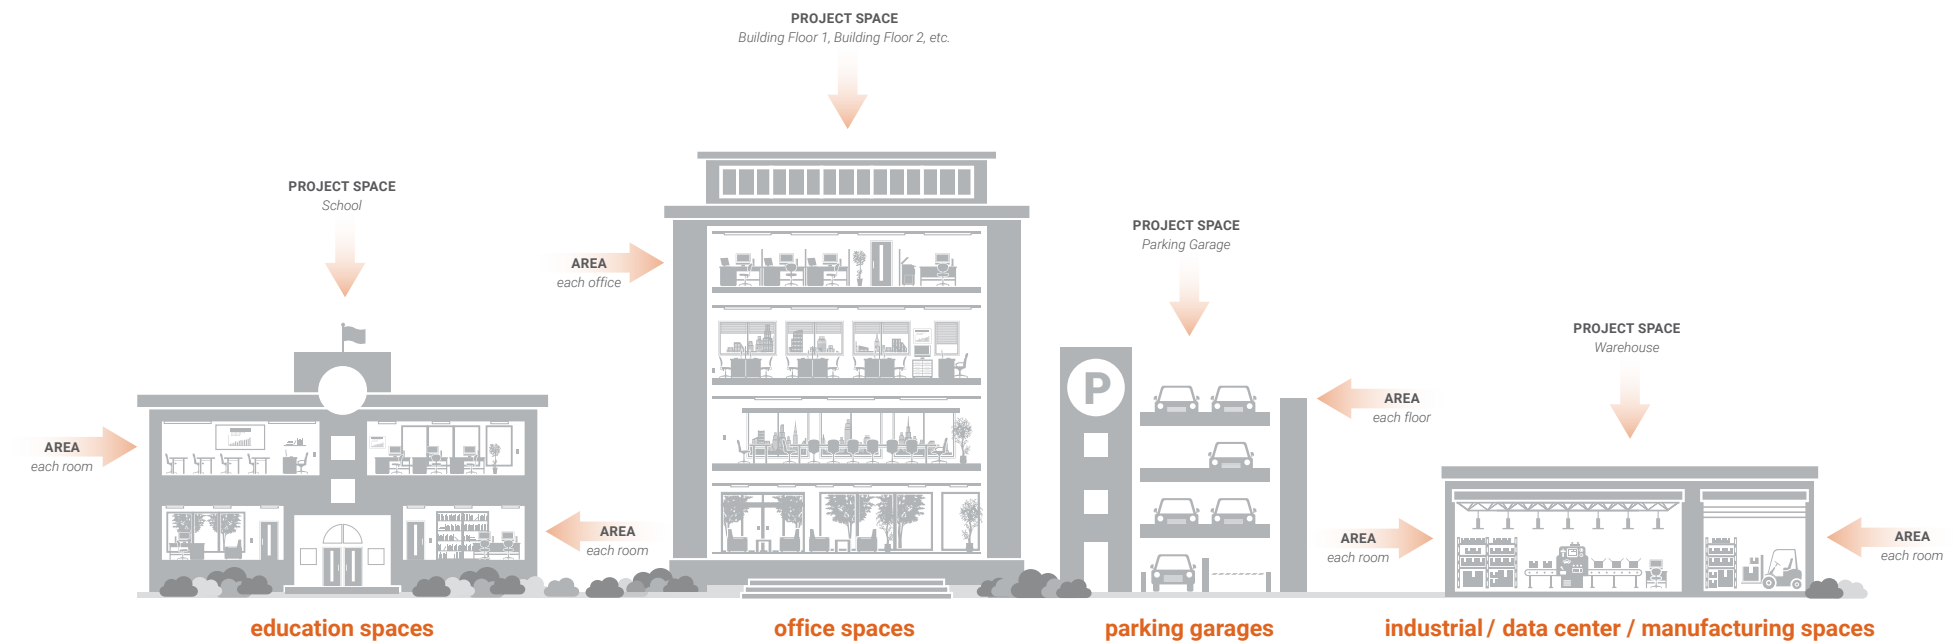- Easily re-configure spaces as requirements change
- Secure system updates

Project Contractor

Transfer Site Ownership via Secure Portal

Project Owner

WaveLinx LITE System Specifications

PROJECT SPACE
Building Floor 1, Building Floor 2, etc.

PROJECT SPACE
School

PROJECT SPACE
Parking Garage

PROJECT SPACE
Warehouse

AREA
each office

AREA
each room

AREA
each room

AREA
each floor

AREA
each room

AREA
each room

education spaces   office spaces   parking garages   industrial / data center / manufacturing spaces

Design:

- Up to 28 areas per project site
- Up to 50 (best practice 40) devices per area
- Up to 16 zones (groups) per area
- Up to 6 occupancy sets per area
- Up to 7 scenes per area
- Up to 100ft (30m) LOS between devices
- Up to 5 hops between devices

Features:

- Integrated, closed-loop photocell for daylight harvesting
- Pre-configured, fully programmable wallstations
- Occupancy and Vacancy mode
- Occupancy hold time with Energy Saver
- High and low-end trim

Set-up:

- Admin users can add other users to join initial commissioning and backup for a building or space

WaveLinx LITE allows multiple user provisioning for speed of provisioning. Site transfer once provisioning is completed ensures security of the site is maintained throughout the life of the system.
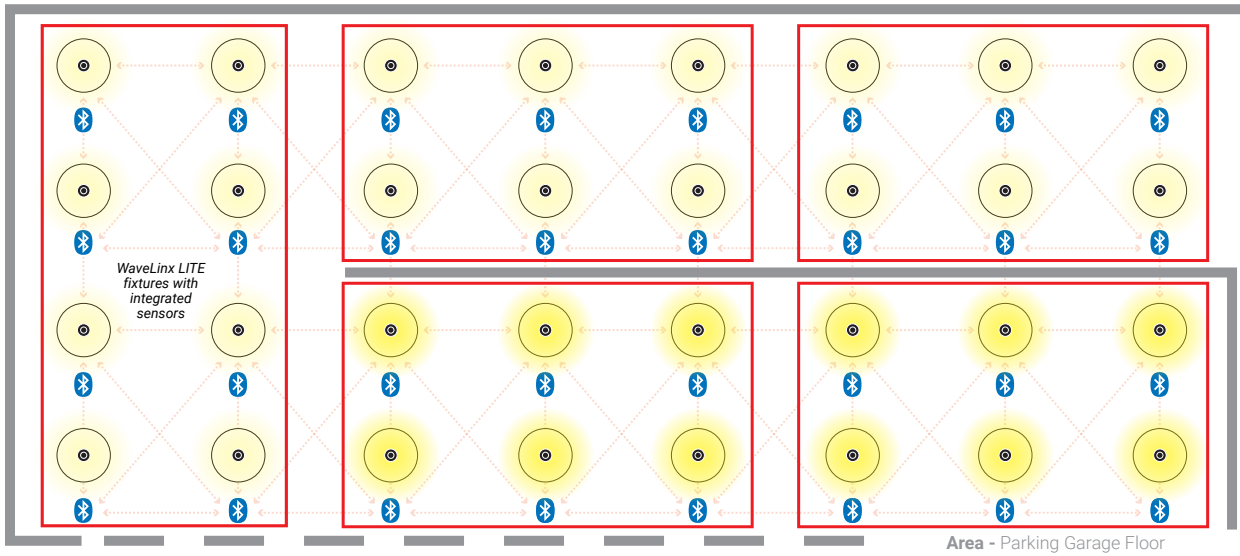
WaveLinx LITE can offer
significant **benefits**

- **40% Less installation time**
- **15% Lower installed cost**
- **25-70% Energy savings**
- **CA T24, ASHRAE, and IECC code compliance**
- **Control your schedule by commissioning on YOUR time**
- **Maintain network integrity using the MyApps secure cloud portal for site creation**
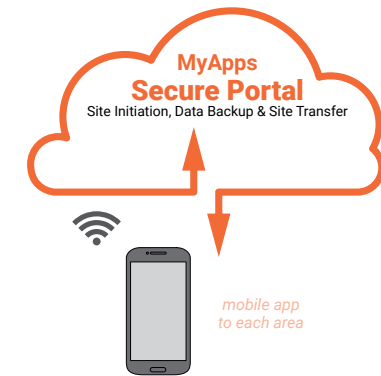
Parking Garage

Reduce labor, cost and installation time with WaveLinx LITE to get low cost compliance for both retrofits and new installation.

In a typical 6 floor parking garage, the WaveLinx LITE system offers significant benefits:
- Improve safety and maintenance
- Reduce installation time with wireless controls by 40%
- Utilize lower cost labor rates for setup

**MyApps
Secure Portal**
Site Initiation, Data Backup & Site Transfer

mobile app to each area

WaveLinx LITE Application:
Parking Garage

- Site = 6 Floor Parking Deck
- 1 Area = 1 Floor (up to 28 per Site)
- 6 Occupancy Sets per Area
- Sensor

WaveLinx LITE fixtures with integrated sensors
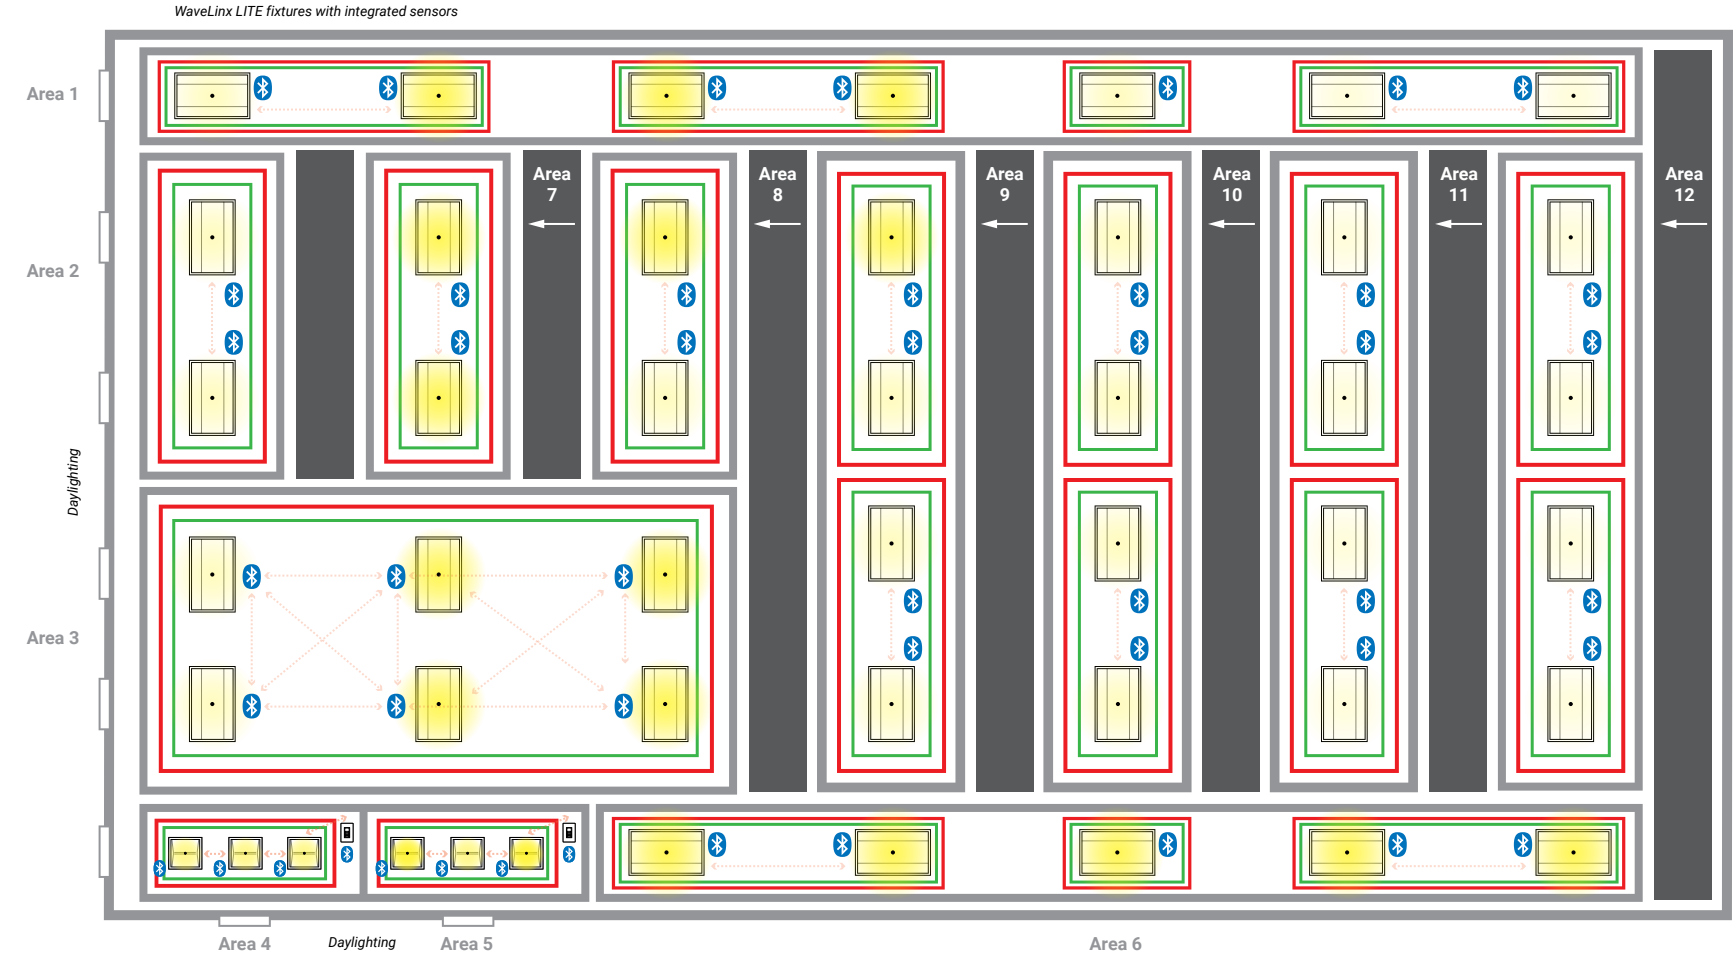
Area - Parking Garage Floor

Industrial

Single fixture to intelligent aisles and manufacturing controls in new and retrofit applications without complicated commissioning or IT involvement.

- Improve productivity and safety while reducing energy consumption
- Configure individual fixtures or create intelligent groups
- Configure through a secure mobile application without special wiring requirements
- Reconfigure spaces wirelessly as needs evolve

**MyApps
Secure Portal**
Site Initiation, Data Backup & Site Transfer

mobile app to each area

WaveLinx LITE Application:
Industrial/Warehouse

- Site = Floor or Building (indoor)
- 1 Area = 1 Room (up to 28 per Site)
- 16 Control Zones per Area
- 6 Occupancy Sets per Area
- Integrated Sensor
- Tilemount Sensor

WaveLinx LITE fixtures with integrated sensors

Area 1
Area 2
Area 3
Area 7
Area 8
Area 9
Area 10
Area 11
Area 12
Daylighting
Area 4
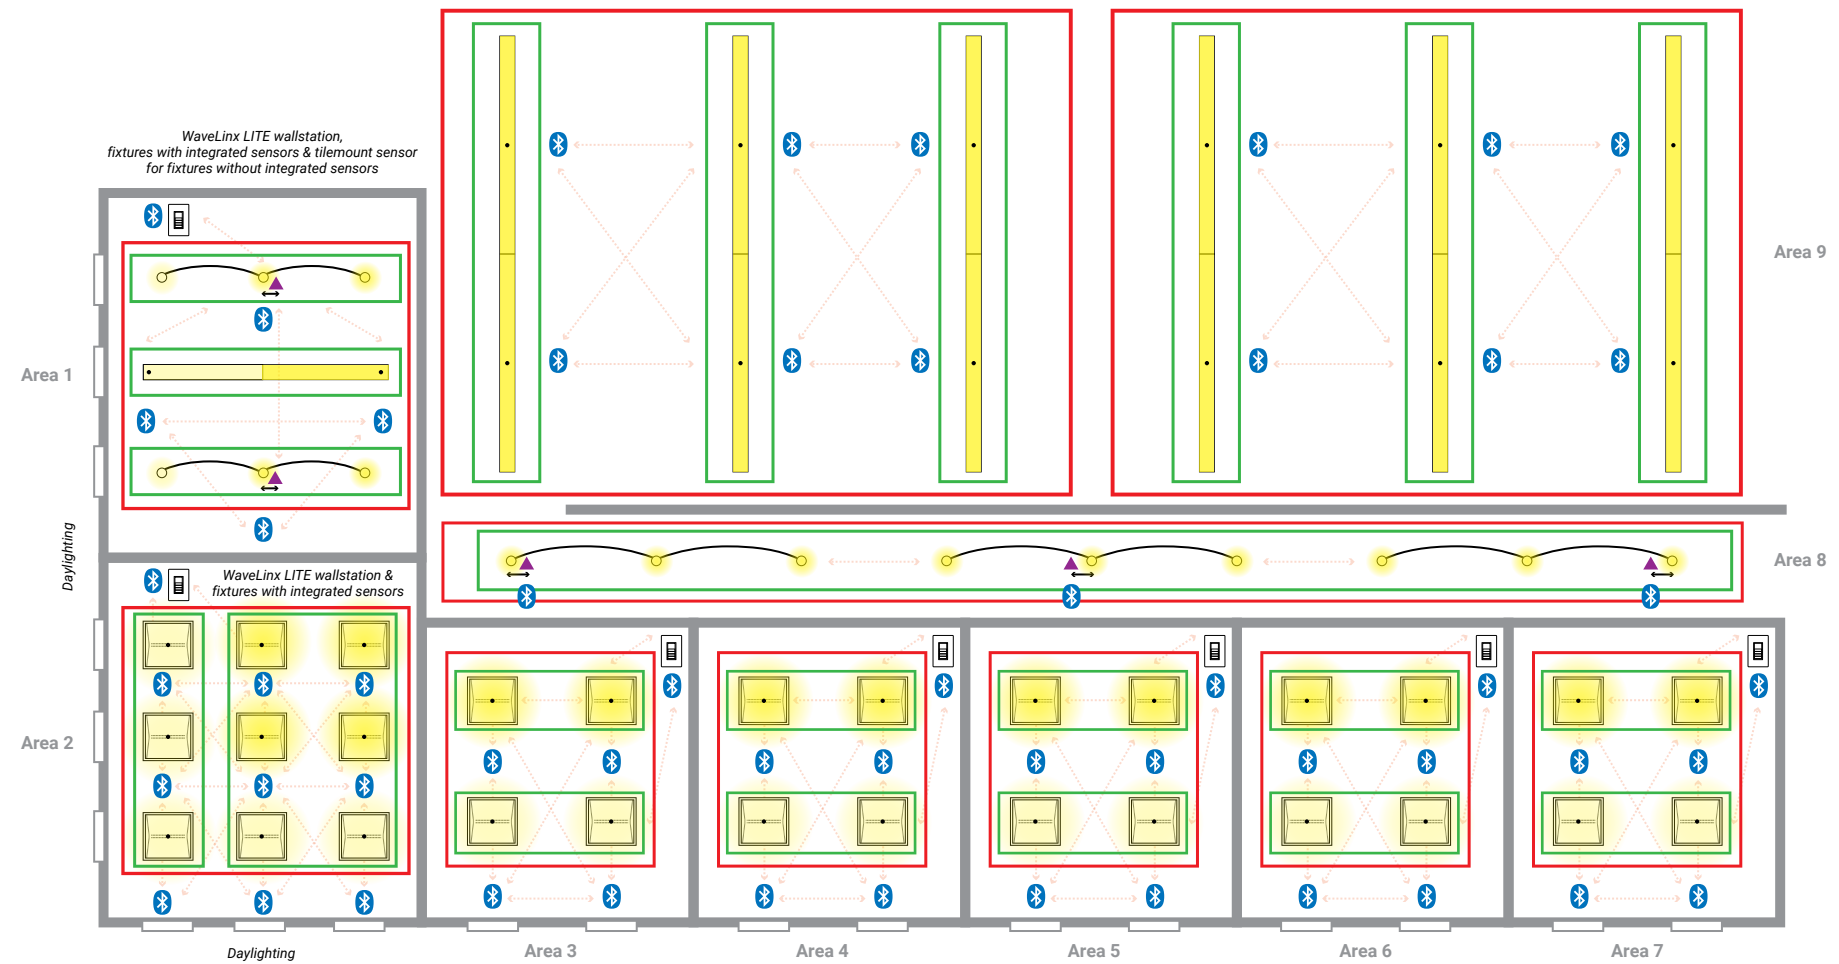*Daylighting*
Area 5
Area 6

Office and Education

Reduce labor, cost and installation time with WaveLinx LITE to get low cost compliance for both retrofits and new installation.

- Improve productivity and maintenance
- Accommodate all users with configurable occupant lighting settings
- Easily program and reconfigure the space without rewiring from a simple mobile app
- Reduce unnecessary accessories with integrated fixtures providing daylight and occupancy detection

MyApps
Secure Portal
Site Initiation, Data Backup & Site Transfer

mobile app to each area

WaveLinx LITE Application:
Office / Education

Site = Floor or Building (indoor)
▭ 1 Area = 1 Room (up to 28 per Site)
▭ 16 Control Zones per Area
▭ 6 Occupancy Sets per Area
● Integrated Sensor
▲ Tilemount Sensor

WaveLinx LITE wallstation, fixtures with integrated sensors & tilemount sensor for fixtures without integrated sensors

Area 1

Daylighting

WaveLinx LITE wallstation & fixtures with integrated sensors

Area 2

Area 9

Area 8

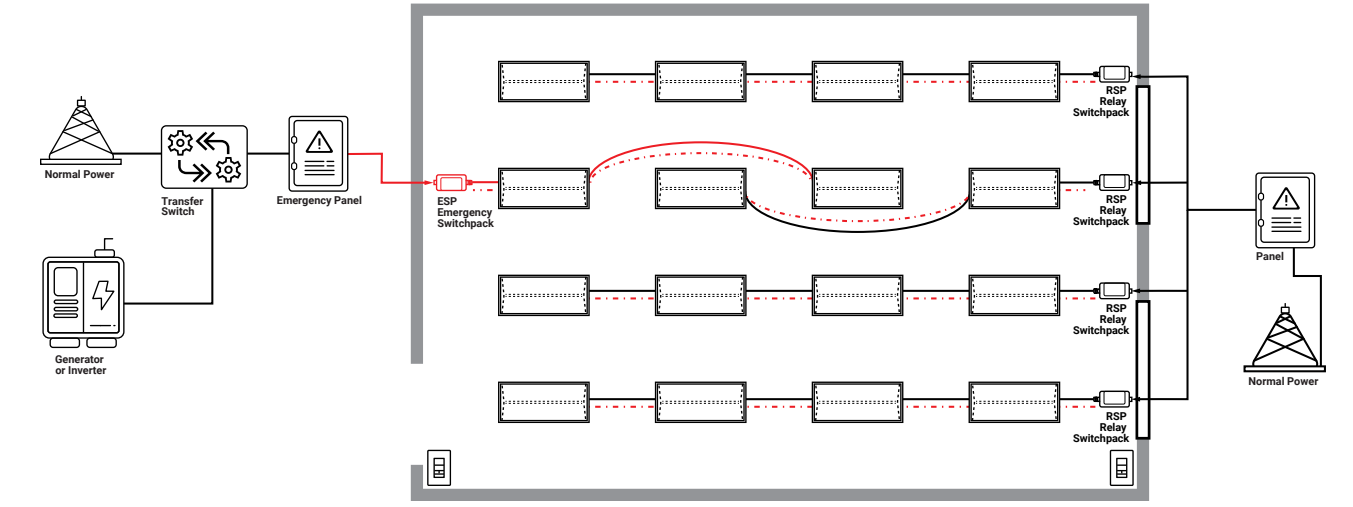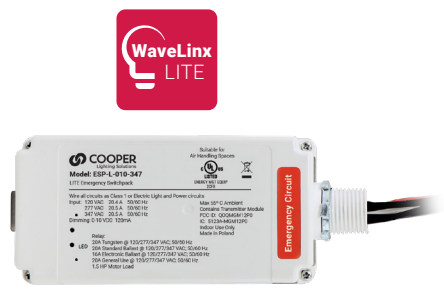*Daylighting*

Area 3
Area 4
Area 5
Area 6
Area 7

Emergency power control for integrated fixtures
Wireless UL924

Detects and responds to an emergency condition even during loss of power to normal devices – without the need for additional feeds. Once normal devices are provisioned, they'll communicate with the emergency device confirming the presence of normal power. The **WaveLinx LITE** mobile app test mode lets you simulate an emergency event without having to transfer power. This functionality allows for regular testing of installed devices without accessing upstream breakers.

WaveLinx LITE Emergency Switchpack (ESP-L) will be available in Q4 2024.

Normal Power
Transfer Switch
Emergency Panel
Generator or Inverter
ESP Emergency Switchpack
RSP Relay Switchpack
Panel
Normal Power

LIGHTING & CONTROL
PRODUCTS

WaveLinx LITE integrated fixtures install quickly with no special wiring requirements and utilize a robust Bluetooth wireless mesh network for simplified customization and control.
• Useful out-of-the-box functionality suitable for many applications
• Configured as a group of devices with the WaveLinx LITE mobile application
• Minimal design requirements
• Lighting and control in one convenient package

Click on products to **learn more**
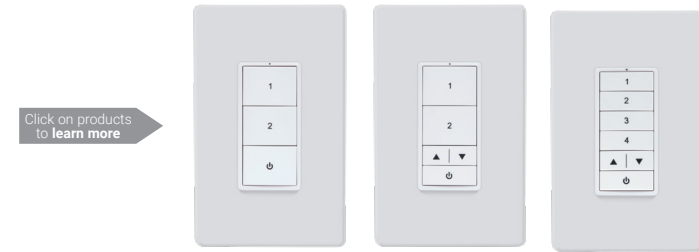
Line Voltage & Battery Powered Wallstations
Dimming | Manual | Scenes | Raise/Lower | Zones | Bluetooth

The line voltage and battery powered wallstation is available in three small and large button configurations. These wallstations are for new or renovation installations and provide customized light level for each area. The wallstation is suitable for standard single or multi-gang NEMA wall boxes. Each wallstation is pre-configured for immediate performance when provisioned to a WaveLinx LITE network and is fully programmable through the WaveLinx LITE Mobile Application, no physical adjustments necessary.

Line voltage powered *(120-277VAC)*
catalog number:
WWL3-W - 3 Button, White
WWL3-RL-W - 3 Button Raise / Lower, White
WWL5-RL-W - 5 Button Raise / Lower, White

Suitable for use with standard and Decora wallplates (not included).
For custom engraving use the configurator tool within the FlashPro Program (CUST-ENGRV).
Note - WaveLinx LITE mobile application required to provision to network and customize programming for each button.

Battery powered *(Utilizes two CR123A alkaline batteries with battery life expectancy up to ten years)*
catalog number:
WWBL3-W - Battery powered, 3 Button, White
WWBL3-RL-W - Battery powered, 3 Button Raise / Lower, White
WWBL5-RL-W - Battery powered, 5 Button Raise / Lower, White

Octagonal junction box installation

Wireless Tilemount Sensor Kit
Sensing | Daylight | Downlights | Wireless

The WaveLinx LITE Tilemount Sensor Kit provides PIR occupancy and daylight dimming and control for connected downlight luminaires or other luminaires that do not support the WaveLinx LITE Integrated Sensor. The Tilemount Sensor Kit provides 0-10V dimming control of LED and non LED loads for up to 3amps 120-277V luminaires.

catalog number:
WTK - LITE Tilemount Kit *
WLST - Fixture Mounted LITE Tilemount Kit
* *- accessory catalog number*

Relay Switchpack
Plug Load | 0-10V | Wireless | Emergency

The wireless dimming switchpack with 0-10V offers 120-347VAC 20amp zero crossing relay control and continuous 0-10V dimming control of LED and non LED loads. The wireless relay switchpack with 0-10V control also supports 20amp plug load control.

catalog number:
RSP-L-010-347 - Wireless Universal Voltage Dimming Switchpack - 20 amp
ESP-L-010-347 - Emergency Universal Voltage Dimming Switchpack - 20 amp

NOTE: WaveLinx LITE devices are not currently compatible with the WaveLinx Area Controller.

Ambient lighting
Integrated sensors

Click on products to **learn more**

Metalux
Configurable Panels (CGTX & FPX)
LED panel

Metalux
Cruze ST & SB
LED recessed ambient

Metalux
Encounter
Recessed ambient WaveStream LED

Metalux
RBG
Architectural linear slot

Metalux
WSL & WSLA
Linear ambient WaveStream LED

Metalux
SkyRidge
Recessed ambient WaveStream LED

Metalux
RLN
LED recessed ambient

Metalux
CooperKit (CBRK)
LED retrofit kit

Indoor Ambient Sensor
Daylighting | Occupancy | PIR Motion Sensing | Bluetooth

The WaveLinx LITE integrated sensor for Indoor Ambient applications is simple yet powerful and scalable. The sensor provides immediate out-of-the-box operation with motion sensing when installed. With the WaveLinx LITE mobile application, fixtures may be provisioned into control groups based on occupancy status and each sensor provides closed loop daylight sensing. The sensor is also upgradeable to the WaveLinx PRO Wireless Connected Lighting system and compatible with WaveLinx CORE enterprise applications.*

catalog number:
WLS/WAB - LITE Sensor for single rooms/spaces

Note - WaveLinx LITE mobile application required to provision to network and customize configuration.

Metalux
SNX
Linear LED striplight

Metalux
SWLED
Linear LED striplight

Metalux
GR
General recessed LED troffer

Architectural lighting

Integrated sensors
Sensing | Daylighting
Individual | Grouping

Click on products to learn more

Corelite
Discreet
Linear suspended
& surface direct LED

Corelite
Continua SQ4
Linear suspended
& wall LED

Corelite
**Continua**
Linear suspended
& wall LED

Corelite
Iridium i3
Linear suspended
WaveStream LED

Neo-Ray
Define Gen 2
Linear recessed &
Linear suspended LED

Corelite
Perceive PT & PD
Architectural recessed

Corelite
InDepth
Architectural recessed

Corelite
Jaylum
Suspended LED

Neo-Ray
Define
Surface & Wall LED

Corelite
D3X
Architectural recessed
WaveStream LED

Corelite
Divide
Suspended & wall
WaveStream LED

Corelite
RZL
Suspended LED

Corelite
RX/ZX
Architectural recessed

Corelite
CL
Architectural recessed
linear slot

Corelite
Hugo
Suspended LED

Recessed lighting

Tile Mount Sensing when installed with WTK Tilemount Sensor Kit

Click on products to learn more

For a complete list of compatible products, see:
**www.cooperlighting.com**

Portfolio
LDA Series
2", 3", 4" and 6"
Adjustable Downlights

Portfolio
**LE / LS Series
- Cylinders**
2", 4" and 6" Round & Square
8" Round
2", 4" and 6" Round & Square
Shallow

Portfolio
**LAM and LDM Series
- Multiples**
1" (1 cell to 15 cells)
Downlight or Adjustable
4" (1 head to 4 heads)

Portfolio
LD Series
2", 4", 6" and 8"
Downlights

HALO Commercial
PR Series
4", 6" and 8"
SeleCCTable Downlights

HALO Commercial
HC Series
4", 6" and 8"
Downlights

Industrial lighting

Integrated sensors
Sensing | Daylighting | Individual | Grouping | Motion

Click on products to learn more

**Industrial Fixture Mount
High Bay / Low Bay Sensor**
The WaveLinx LITE industrial high bay / low bay sensors offer passive infrared (PIR) occupancy with a photocell for closed loop daylight sensing. The sensors are IP66 rated for warehouse, manufacturing and industrial spaces with installation heights up to 40 feet (45 feet major motion) and coverage up to 5000 square feet. Easy tool-less fixture connection (Zhaga Book 18 socket) with out-of-the-box controls functionality. Factory or field install this sensor with 4 pin connector standard.

catalog number - Metalux Industrial models with WaveLinx LITE sensors integrated:
WLS2 - Fixture Mount Low Bay Sensor, 7 - 15ft (2.1 - 4.5m)

WLS4 -Fixture Mount High Bay Sensor, 15 - 40ft (4.5 - 12.2m)

(WaveLinx LITE Sensors also available individually - see spec sheets)

Metalux
OHB & OHBL
High Bay LED

Metalux
VHB
High Bay LED

Metalux
LHB
LED High Bay

Metalux
VT2
LED Vaportite

Metalux
VT3
LED Vaportite

Metalux
VT4
LED Vaportite

Metalux
Benchmark - BMK
High Bay LED

Metalux
Steeler - SSLED
High Bay LED

Metalux
SNLED (see also SNX)
LED Striplight

Metalux
SkyBar Single - SKB1
LED Low Bay

NOTE: WaveLinx LITE devices are not currently compatible with the WaveLinx Area Controller.

For a complete list of compatible products, see:
www.cooperlighting.com

Outdoor lighting

Sensing | Motion | Daylighting
Individual | Group / Zone

Click on products
to **learn more**

4-pin Zhaga
Book 18 socket

Outdoor Fixture High / Low Mount Sensor

Daylighting | Occupancy |
PIR Motion Sensing | Bluetooth

The WaveLinx LITE integrated sensor for Galleon and Top Tier parking garage applications is simple yet powerful and scalable. The sensor provides immediate standalone dusk-to-dawn operation with motion sensing when installed. With the WaveLinx LITE mobile application, fixtures may be provisioned into control groups based on occupancy status and each sensor provides closed loop daylight sensing. The sensor is also upgradeable to the WaveLinx PRO Wireless Connected Lighting system and compatible with WaveLinx CORE enterprise applications.

catalog number:
WLS2xx   Outdoor Fixture Low Mount Sensor
             7 - 15ft (2.1 - 4.5m)

WLS2xx   Outdoor Fixture High Mount Sensor
             15 - 40ft (4.5 - 12.2m)

xx - Available in white (WH), bronze (BZ), and black (BK)
Note - WaveLinx LITE mobile application required to provision to network and customize configuration.

For a complete list of compatible products, see:

www.cooperlighting.com

McGraw-Edison
Galleon LED
Area and site,
Wall, PC
and Flood

Outdoor fixture options are available in WaveLinx "ready" or fully integrated options

Streetworks
Archeon Nano
Roadway

Streetworks
Archeon Small
Roadway

Streetworks
Caretaker 2
Area and Roadway

McGraw-Edison
Top Tier LED
Area and site,
Wall, PC and Flood

Lumark
RPGC
Parking Garage
and Canopy

TESTIMONIALS

The Lovett School - Atlanta, GA

"The abilities of this system without the need to add additional wiring is a game changer."

Chris Haddox
Facilities Management Electrician,
The Lovett School

"The WaveLinx LITE system has allowed us to control the site lighting to meet the needs of the school. The grouping feature allows us to adjust lights that directly impact neighboring homes while still maintaining ideal light levels throughout the structure to maintain safety."

Brian Holtzapfel
Director of Plant Operations,
The Lovett School

Level 2

Lighting Brands

Ametrix

AtLite

Corelite

Ephesus

Fail-Safe

HALO

HALO Commercial

Invue

iO

Iris

Lumark

LumarkAP

Lumière

McGraw-Edison

Metalux

MWS

NeoRay

Portfolio

PrentaLux - 3D Printed Lighting

RSA

Shaper

Streetworks

Sure-Lites

Controls Brands

Greengate

Fifth Light

Intelligent Lighting Controls

**Connected Lighting Systems
and Smart Spaces Platform**

WaveLinx

Trellix Infrastructure

SCAN
for more
WaveLinx LITE
information

COOPER
Lighting Solutions